




Improving on the Leader

Heatfab Saf-T Vent high quality commercial and residential venting products are engineered for Special Gas Vent applications and specified by OEM's for more than 25 years.

Saf-T Vent® was the first Venting System to use super-ferritic stainless steel, Tested and Listed to UL1738, ULC S636 (Special Gas Vent Systems). The combination of high quality products and engineering support ensures your installation has high-performance quality from appliance adapter to termination.

Designed to meet the rigorous demands of large, high-efficiency gas-fired heating appliances.

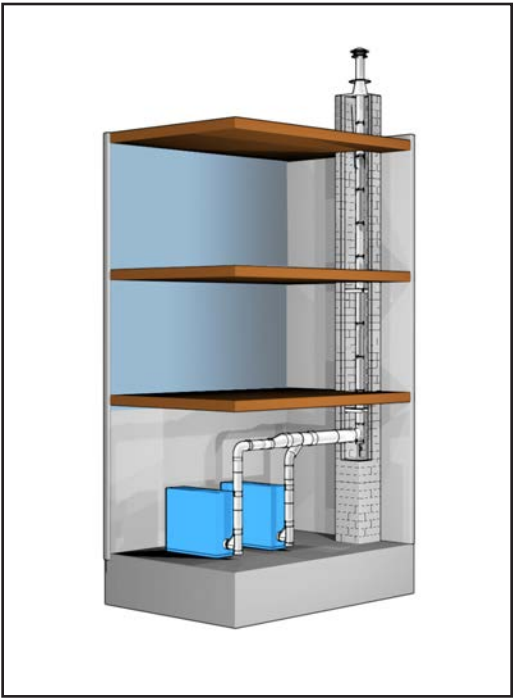

COMMERCIAL BOILER  
MASONRY CHIMNEY LINER

Technical Specifications:

- 18" - 32" diameters ID
- Super-ferritic stainless steel (29-4C)
- Engineered with overlapping joint
- Sure Seal™ locking system

Uses:

- Special gas vent, gas vent connector or masonry chimney liner
- ANSI Category I, II, III, or IV appliances
- Negative, neutral or positive pressure venting systems

Fuels:

- Natural Gas
- Propane

Pressure:

Up to 15" W.C.

Temperature:

Listed for all appliances with flue gas temperatures up to 550°F.

UL/cUL:

Gas: Tested and Listed to UL 1738 (Special Gas Vent) and ULC-S636 in Canada (Type BH Gas Vent).

Installation Requirements:

Follow installation and maintenance guide.

To view Clearance to Combustible specifications, please visit [www.heatfab.com](http://www.heatfab.com)

Corporate Headquarters:

Duravent Group  
28 W. Adams, Suite 1810  
Detroit, MI 48226  
Email: [commercial@duraventgroup.com](mailto:commercial@duraventgroup.com)

(USA) Heatfab: 800.772.0739  
(CAN) Heatfab: 800.848.2149

[www.heatfab.com](http://www.heatfab.com)



BUILD FOR THE FUTURE

[www.duraventgroup.com](http://www.duraventgroup.com)



HF\_CV\_GC Plus\_SB-001E\_06-24



Saf-T Vent®  
GC Plus

Commercial/Industrial

Leading brand of high quality factory-built venting for Special Gas Vent applications, specified by OEMs for over 25 years.

- Single wall 18"-32" diameters ID
- Engineered with over-lapping joint to keep condensate away from seal
- Quick and easy installation with Sure Seal™ locking system
- Features super-ferritic stainless steel UNS S44735 (29-4C) for superior corrosion resistance
- Tested and Listed to UL 1738 (Special Gas Vent) and ULC-S636 (Type BH Gas Vent)



Saf-T Vent® GC Plus  
for high performance  
and reliability.

### Saf-T Vent GC Plus Applications


UL/cUL Tested and Listed single wall special gas vent system for commercial applications specially suited to:

- **ANSI Category I, II, III, & IV vent applications**
- **Negative, neutral, or positive pressure vent systems**
- **Condensing, near-condensing, and non-condensing gas vent systems**

Superior resistance to condensate by-product corrosion.

Listed for all gas appliances with flue gas temperatures up to 550°F (ref. installation instructions for minimum clearance to combustibles).

### Sure Seal™ Locking System

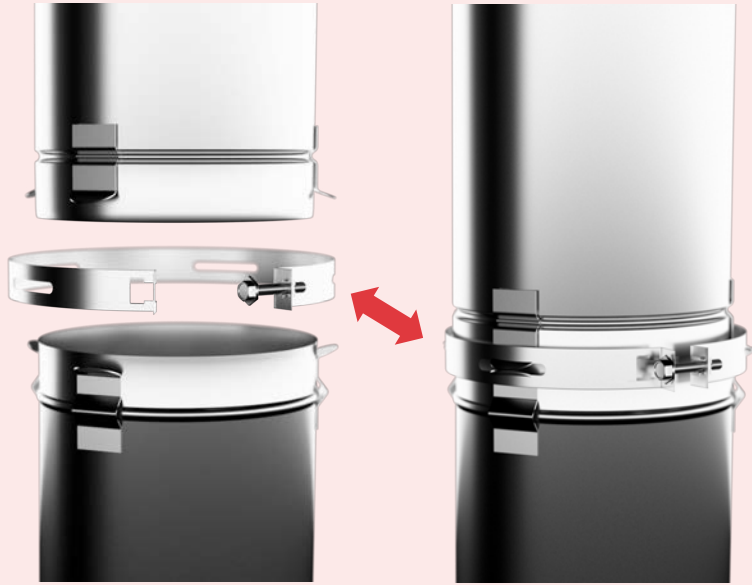

***Sure Seal™ one-piece locking strap assembly provides quick and easy installation and locks on flue gas conduit to provide a strong secure joint and help prevent leaks.***

### FEATURES AND BENEFITS

- **Factory-built for high quality, durability and long life**
- **Constructed of super-ferritic stainless steel, UNS S44735 (29-4C), for superior resistance to acids commonly found in boiler flue condensate**
- **Sure Seal™ one-piece locking strap assembly provides quick and easy installation and locks on flue gas conduit to provide a strong secure joint and help prevent leaks**
- **Component design engineered with an overlapping joint to keep acidic condensate away from the seal (field-applied UL listed Heatfab sealant)**
- **18" to 32" diameter (ID) to fit the wide range of customer applications**
- **Up to 550 °F max temperature rating with low clearance to combustibles**
- **Superior Safety Factor vs PVC/CPVC venting**
- **Meets all code requirements – tested and listed to UL 1738 (Special Gas Vent) and ULC S636 in Canada (Type BH Gas Vent)**
- **Array of components and accessories designed to make installation simple and quick**
- **Backed by Saf-T Vent 15-Year Limited Warranty**

Heatfab Saf-T Vent provides the broadest line of Special Gas Vent components and systems available, in 3-inch through 32-inch single-wall, double-wall and direct vent models.

High-tech welding and fabricating equipment ensures components are consistent in size, fit and finish, whether you order 2 pieces or 2,000.


# GC Plus at work

### Advanced Materials For High Performance

With Sure Seal™ locking system, Saf-T Vent GC Plus, installs fast and secure.

Precision laser welding and the highest quality super-ferritic stainless steel is used.

You can install the very best high efficiency venting, quick and easy.

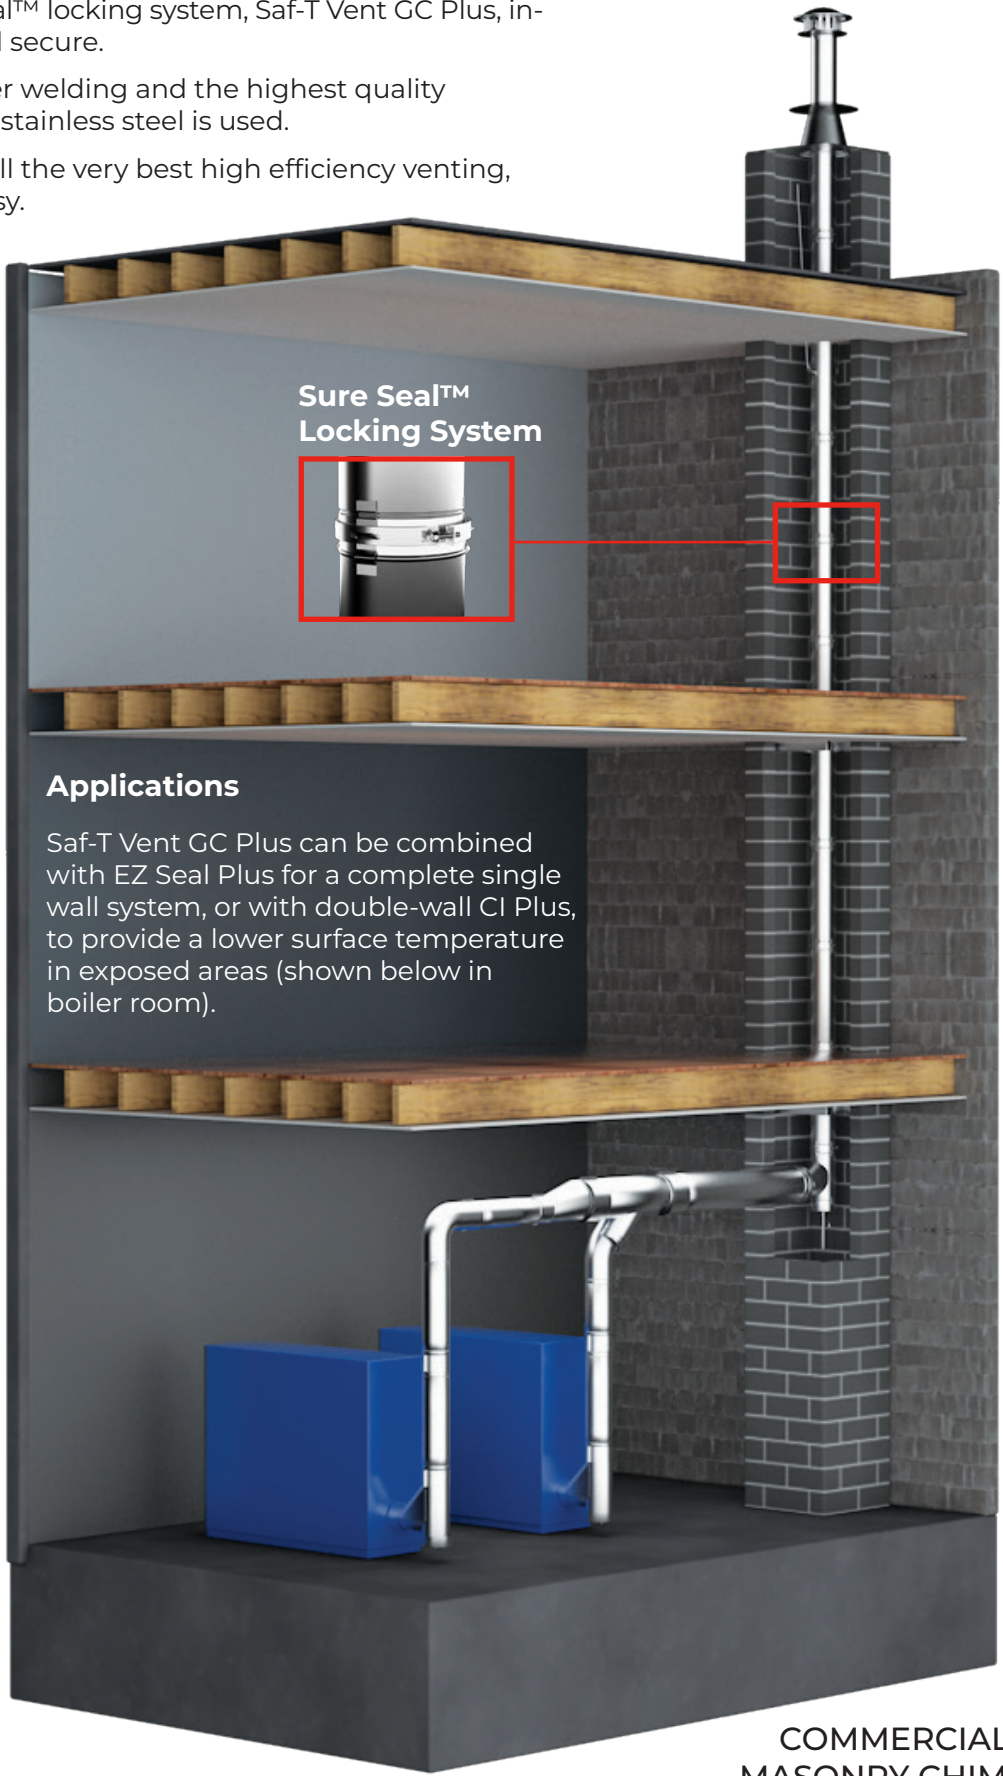

### Applications

Saf-T Vent GC Plus can be combined with EZ Seal Plus for a complete single wall system, or with double-wall CI Plus, to provide a lower surface temperature in exposed areas (shown below in boiler room).

COMMERCIAL BOILER  
MASONRY CHIMNEY LINER